



LQ4 Series quick disconnect couplings provide ultra-reliable, dripless connections and disconnections that protect valuable electronics. Designed specifically for liquid cooling applications, LQ4 utilizes patent-pending valve technology that eliminates drips and is able to withstand long-term use.

Specifications

PRESSURE:

Vacuum to 120 psi, 8.3 bar

TEMPERATURE:

0°F to 240°F (-17°C to 115°C)

MAXIMUM FLOW AT DISCONNECT:

3.0 gal/min, 11.3L/min

MATERIALS:

Main housing components: Chrome-plated brass

Valves and thumb latch: Polysulfone

Valve spring (wetted): Stainless steel

External spring: Stainless steel

Seals: EPDM

COLOR:

Chrome with Cool Blue or Chrome with Warm Red

TUBING SIZES:

1/4" to 3/8" ID, 6.4mm to 9.5mm ID

LUBRICANTS: Krytox® PFPE

SPILLAGE:

0.025 cc per disconnect rated at 0 psi

0.055 cc per disconnect rated at 120 psi

INCLUSION: 0.025 cc per connect

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.


FEATURES

- Non-spill design
- Redundant sealing when connected
- Color-coding
- No seal friction in disconnect even after connected state
- Ruggedness
- Rotation allows movement


BENEFITS

- Disconnect under pressure with no spills
- Extra protection from leaks
- Instant visual difference in cooling lines
- Ultra-reliable protection from drips at long periods in connected state
- Able to withstand long-term, repeated use
- Eliminates tube kinking


LQ4 Water Flow (0 – 20 GPM)

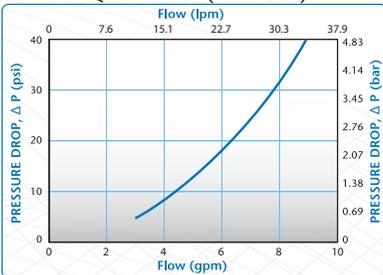

LQ4 Water Flow (0 – 2 GPM)

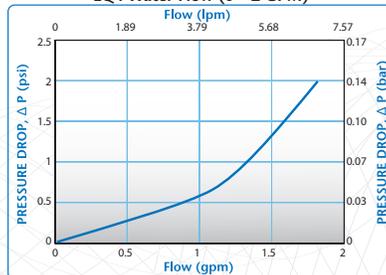

LQ4 Force to Connect Coupling

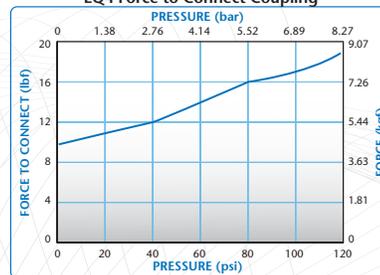


These graphs are intended to give you a general idea of the performance capabilities of each product line. Contact CPC for flow of a particular coupling combination.

Visit us at cpcworldwide.com or call 800-444-2747 to get a free catalog or to find your local distributor.



Product Dimensions

A = HEIGHT/DIAMETER
B = TOTAL LENGTH

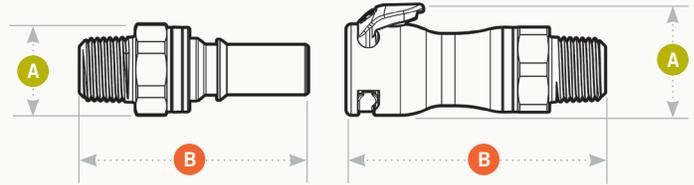

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters.

Coupling Bodies • CHROME-PLATED BRASS



TERMINATION	THREAD SIZE	METRIC EQ.	SHUT OFF	A	B
IN-LINE	1/4" ID	6.4mm ID	LQ4D17004RED	0.98	2.49
HOSE BARB	1/4" ID	6.4mm ID	LQ4D17004BLU	0.98	2.49
	3/8" ID	9.5mm ID	LD4D17006RED	0.98	2.49
	3/8" ID	9.5mm ID	LQ4D17006BLU	0.98	2.49
IN-LINE	1/4 SAE-04		LQ4D30004RED	0.98	2.29
STRAIGHT THREAD	1/4 SAE-04		LQ4D30004BLU	0.98	2.29
PORT SAE	3/8 SAE-06		LQ4D30006RED	0.98	2.29
	3/8 SAE-06		LQ4D30006BLU	0.98	2.29
IN-LINE	1/4" NPT		LQ4D10004RED	0.98	2.31
PIPE THREAD	1/4" NPT		LQ4D10004BLU	0.98	2.31
	3/8" NPT		LQ4D10006RED	0.98	2.31
	3/8" NPT		LQ4D10006BLU	0.98	2.31
IN-LINE	1/4" ID x 3/8" OD		LQ4D13006RED	0.98	2.46
PTF	1/4" ID x 3/8" OD		LQ4D13006BLU	0.98	2.46

Coupling Inserts • CHROME-PLATED BRASS



TERMINATION	THREAD SIZE	METRIC EQ.	SHUT OFF	A	B
IN-LINE	1/4" ID	6.4mm ID	LQ4D22004RED	0.74	2.22
HOSE BARB	1/4" ID	6.4mm ID	LQ4D20004BLU	0.74	2.22
	3/8" ID	9.5mm ID	LQ4D22006BLU	0.74	2.22
	3/8" ID	9.5mm ID	LQ4D22006RED	0.74	2.22
IN-LINE	1/4 SAE-04		LQ4D46004BLU	0.80	2.02
STRAIGHT THREAD	1/4 SAE-04		LQ4D46004RED	0.80	2.02
PORT SAE	3/8 SAE-06		LQ4D46006BLU	0.80	2.02
	3/8 SAE-06		LQ4D46006RED	0.80	2.02
IN-LINE	1/4" NPT		LQ4D24004RED	0.80	2.04
PIPE THREAD	1/4" NPT		LQ4D24004BLU	0.80	2.04
	3/8" NPT		LQ4D24006RED	0.80	2.04
	3/8" NPT		LQ4D24006BLU	0.80	2.04
IN-LINE	1/4" ID x 3/8" OD		LQ4D20006RED	0.80	2.19
PTF	1/4" ID x 3/8" OD		LQ4D20006BLU	0.80	2.19



COLDER PRODUCTS COMPANY
U.S.A.

PHONE +1 651-645-0091
FAX +1 651-645-5404
TOLL FREE 800-444-2474

COLDER PRODUCTS COMPANY GMBH
Germany

PHONE +49-6026-9973-0
FAX +49-6026-9973-173

COLDER PRODUCTS COMPANY LIMITED
Hong Kong

PHONE +852-2987-5272
FAX +852-2987-2509

Smart fluid handling to take you forward, faster.

cpcworldwide.com/ContactUs

WARRANTY: All sales are subject to Colder Products Company's limited express warranty set forth in the CPC catalog. Contact your local distributor or CPC Customer Service for warranty provisions.

Warning: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

COPYRIGHT © 2014 BY COLDER PRODUCTS COMPANY. COLDER PRODUCTS COMPANY, COLDER PRODUCTS AND CPC ARE REGISTERED TRADEMARKS WITH THE US PATENT & TRADEMARK OFFICE.

SPEC1035 9/14 FI/3000 PRINTED IN THE U.S.A.