

LC SERIES CONNECTOR



CPC's LC Series chrome-plated brass couplings are built tough and made to last in the most demanding applications. Ideal for use with higher temperature or pressure, the LC Series features a one-hand operation for swift and easy connects and disconnects. These couplings offer the flexibility of multiple configurations and terminations to mate with both the PLC acetal and PLC12 polypropylene couplings.

FEATURES

Brass material

Chrome plating

High temperature capability

CPC thumb latch

Compatible

BENEFITS



Durable construction withstands higher pressure and temperature

Attractive appearance

Versions rated to 400°F (204°C)

One-hand connection and disconnection

LC mates with PLC Series couplings

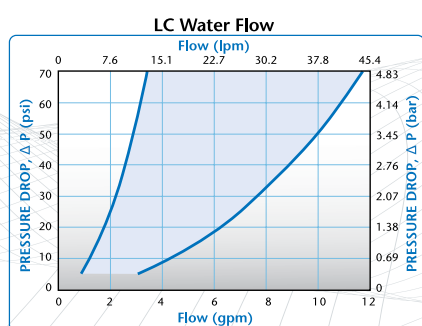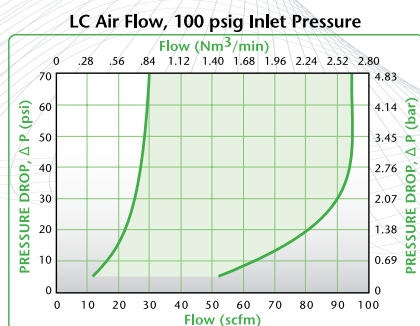

Specifications

PRESSURE:

Vacuum to 250 psi, 17.3 bar

TEMPERATURE:

-40°F to 180°F (-40°C to 82°C)
(High temperature versions available with ratings to 400°F)

MATERIALS:

Main components: Chrome-plated brass

Thumb latch: Stainless steel

Valves: Acetal

Valve springs: 316 stainless steel

External springs and pin: Stainless steel

O-rings: Buna-N

FINISH:

Chrome

TUBING SIZES:

1/4" to 3/8" ID, 6.4mm to 9.5mm ID

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.

*Note:
High temperature
versions available with
ratings to 400 F. Call
customer service for
more information.*

*Also available in NSF
listed versions for food-
based applications, please
visit our website for part
number information.*



« These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of each graph represents the operating range of the product family, i.e., upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.

DID YOU KNOW?

O-RING SELECTION IS A KEY DECISION in determining which connector will perform best in your specific application. Understanding the material characteristics and how they can be affected by both the media being transferred and the environment in which the connector is being used is important.

BUNA-N is the most common o-ring seal due to its solvent, oil and water resistance. Temperature range is -40°F to 250°F.

FKM is best suited for applications where chemical and strong acid resistance and/or high temperatures are a requirement. The temperature range is -15°F to 400°F.

EPDM has excellent resistance to polar solvents. This o-ring is not compatible with petroleum. The temperature range is -70°F to 300°F.

SILICONE seals have good temperature resistance. The temperature range is -70°F to 400°F and with special compounds can reach 175°F to 450°F. Silicone can also be supplied with Class VI requirements for medical/bioprocessing applications.

For further information about which o-ring is best suited for your application, please contact CPC Customer Service at 1-800-444-2474 or 651-645-0091.

NOTES:

Liquid Flow Rate Information for Couplings

The chart below shows the flow rate for CPC couplings. Each coupling was tested with water at 70°F (21°C). To determine flow rates for specific coupling configurations use the formula at the right.


$$Q = C_v \sqrt{\frac{\Delta P}{S}}$$

Q = Flow rate in gallons per minute
C_v = Average coefficient across various flow rates (see chart)
ΔP = Pressure drop across coupling (psi)
S = Specific gravity of liquid

C_v VALUES FOR 1/4" FLOW LC COUPLINGS

BODIES	INSERTS	LC 20004	LCD 20004	LC 20006	LCD 20006	LC 22004	LCD 22004	LC 22006	LCD 22006	LC 24004	LCD 24004	LC 24006	LCD 24006	LC 26004
	LC10004	.40	.36	1.05	.58	.83	.56	1.40	.82	1.40	.75	1.40	.77	.83
	LCD10004	.36	.31	.73	.48	.66	.41	.82	.50	.80	.45	.77	.45	.81
	LC10006	.40	.36	1.05	.60	.83	.56	1.40	.81	1.40	.76	1.40	.76	.83
	LCD10006	.37	.31	.81	.47	.70	.43	1.02	.51	.98	.46	.99	.48	.98
	LC12006	.38	.36	.84	.63	.74	.56	1.14	.75	1.14	.70	1.14	.72	.74
	LCD12006	.38	.33	.78	.49	.68	.44	.84	.49	.81	.43	.82	.44	.81
	LC16004	.38	.37	.87	.54	.95	.51	1.00	.70	.95	.64	1.00	.66	.95
	LCD16004	.37	.31	.61	.44	.57	.41	.78	.44	.78	.43	.75	.46	.78
	LC16006	.38	.37	1.00	.57	.95	.53	1.40	.80	1.40	.71	1.40	.73	1.40
	LCD16006	.38	.32	.71	.49	.63	.42	.89	.51	.96	.45	.92	.49	.97


LC DIMENSIONS

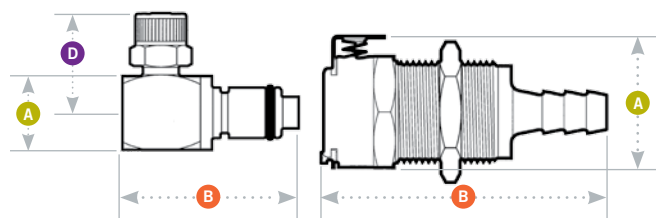

- A = Height/Diameter
- B = Total Length
- D = Elbow Radial Length

Product Dimensions

	PANEL OPENING	PANEL THICKNESS MAX.-MIN.	PANEL NUT HEX	PANEL NUT THREAD
COUPLING BODIES	see drawing	.50 — .05	13/16	11/16-24UNEF
COUPLING INSERTS	see drawing	.090 — .300	13/16	11/16-24UNEF



Coupling Bodies • CHROME-PLATED BRASS



**TERMINATION
IN-LINE
PIPE THREAD**



**PANEL MOUNT
FERRULELESS
POLYTUBE FITTING,
PTF†**



**PANEL MOUNT
HOSE BARB**



**PANEL MOUNT
MALE THREAD**



**IN-LINE
FERRULELESS
POLYTUBE FITTING,
PTF†**



**IN-LINE
HOSE BARB**

TUBING/THREAD SIZE METRIC EQ.

1/4" NPT
1/4" BSPT
3/8" NPT
3/8" BSPT

6.4mm OD, 4.3mm ID
9.5mm OD, 6.4mm ID

STRAIGHT THRU

LC10004
LC10004BSPT
LC10006
LC10006BSPT

SHUTOFF

LCD10004
LCD10004BSPT
LCD10006
LCD10006BSPT

A .88
1.15
1.15
1.15

B 1.15
1.15
1.15
1.15

1/4" OD, .17" ID
3/8" OD, .25" ID

6.4mm OD, 4.3mm ID
9.5mm OD, 6.4mm ID

LC12004
LC12006

LCD12004
LCD12006

A .88
1.15
1.15
1.15

B 1.87
2.00

1/4" ID
5/16" ID
3/8" ID

6.4mm ID
7.9mm ID
9.5mm ID

LC16004
LC16005
LC16006

LCD16004
LCD16005
LCD16006

A .88
1.15
1.15
1.15

B 2.00
2.00
2.00

1/4" NPT

LC15004

LCD15004

A .88
1.15
1.15
1.15

B 1.50

1/4" OD, .17" ID
3/8" OD, .25" ID

6.4mm OD, 4.3mm ID
9.5mm OD, 6.4mm ID

LC13004
LC13006

LCD13004
LCD13006

A .88
1.15
1.15
1.15

B 1.87
2.00

1/4" ID
5/16" ID
3/8" ID

6.4mm ID
7.9mm ID
9.5mm ID

LC17004
LC17005
LC17006

LCD17004
LCD17005
LCD17006

A .88
1.15
1.15
1.15

B 2.00
2.00
2.00

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters.
†NOTE: CPC's Ferruleless Polytube Fitting terminations do not require ferrules to achieve a secure connection, which makes them easier to use and reuse. PTF fittings are designed for semi-rigid tubing, i.e., polyethylene, nylon, polyurethane, etc.

Coupling Inserts • CHROME-PLATED BRASS



TERMINATION IN-LINE PIPE THREAD



IN-LINE PIPE THREAD (FEMALE)



PANEL MOUNT FERRULELESS POLYTUBE FITTING, PTF†



PANEL MOUNT HOSE BARB



IN-LINE FERRULELESS POLYTUBE FITTING, PTF†



IN-LINE HOSE BARB



ELBOW FERRULELESS POLYTUBE FITTING, PTF†



ELBOW HOSE BARB

TUBING/THREAD SIZE METRIC EQ.

1/4" NPT
1/4" BSPT
3/8" NPT
3/8" BSPT

1/4" NPT Female
1/4" BSPP Female

1/4" OD, .17" ID 6.4mm OD, 4.3mm ID
3/8" OD, .25" ID 9.5mm OD, 6.4mm ID

1/4" ID 6.4mm ID
5/16" ID 7.9mm ID
3/8" ID 9.5mm ID

1/4" OD, .17" ID 6.4mm OD, 4.3mm ID
3/8" OD, .25" ID 9.5mm OD, 6.4mm ID

1/4" ID 6.4mm ID
5/16" ID 7.9mm ID
3/8" ID 9.5mm ID

1/4" OD, .17" ID 6.4mm OD, 4.3mm ID
3/8" OD, .25" ID 9.5mm OD, 6.4mm ID

1/4" ID 6.4mm ID
3/8" ID 9.5mm ID

STRAIGHT THRU

LC24004
LC24004BSPT
LC24006
LC24006BSPT

LC26004
LC26004BSPP

LC40004
LC40006

LC42004
LC42005
LC42006

LC20004
LC20006

LC22004
LC22005
LC22006

LC21004
LC21006

LC23004
LC23006

SHUTOFF

LCD24004
LCD24004BSPT
LCD24006
LCD24006BSPT

LCD26004
LCD26004BSPP

LCD40004
LCD40006

LCD42004
LCD42005
LCD42006

LCD20004
LCD20006

LCD22004
LCD22005
LCD22006

LCD21004
LCD21006

LCD23004
LCD23006

.72

.72

.87

.87

.72

.72

.94

.94

.94

.94

.94

.72

.72

.63

.63

.63

.63

.63

.63/.62

.63/.62

1.25/1.68

1.25/1.68

1.25/1.55

1.25/1.55

1.25/1.90

1.25/1.75

1.83/1.98

1.96/2.11

1.96/2.11

1.96/2.11

1.96/2.11

1.25/1.87

1.38/1.83

1.35/2.00

1.35/1.85

1.35/1.83

1.28/1.43

1.28/1.43

1.28/1.43

1.28/1.43

.96

.83

.96

.96

1.28

1.28

1.28

1.28

1.28

1.28

1.28

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters. Couplings are pictured with valves unless otherwise noted.

†NOTE: CPC's Ferruleless Polytube Fitting terminations do not require ferrules to achieve a secure connection, which makes them easier to use and reuse. PTF fittings are designed for semi-rigid tubing, i.e., polyethylene, nylon, polyurethane, etc.

美国CPC_Colder Products Company快速接头和连接器
授权西北代理商联系方式

西安嘉岳自动化技术有限公司 Garye Automation Company

地址：西安市未央区未央大道138-1号中登大厦A座十二层

电话：029 - 8647 4991 邮编：710016

传真：029 - 8647 3942 公司QQ:3180038393

手机：182 9256 1696

E-mail：sales@garye.cn

Web：http://www.garye.cn