

LQ4 SERIES CONNECTOR





LQ4 Series quick disconnect couplings provide ultra-reliable, dripless connections and disconnections that protect valuable electronics. Designed specifically for liquid cooling applications, LQ4 utilizes patent-pending valve technology that eliminates drips and is able to withstand long-term use.

FEATURES

- Non-spill design
- Redundant sealing when connected
- Color-coding
- Friction-free valve
- Ruggedness
- Rotation allows movement

BENEFITS

- Disconnect under pressure with no spills
- Extra protection from leaks
- Instant visual difference in cooling lines
- Valving system designed for extended periods in connected state
- Able to withstand long-term, repeated use
- Eliminates tube kinking

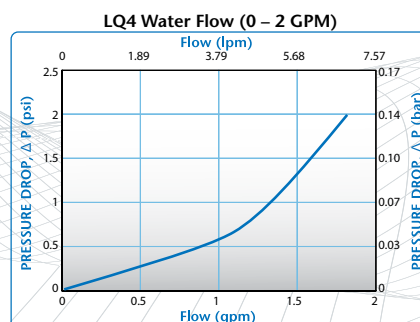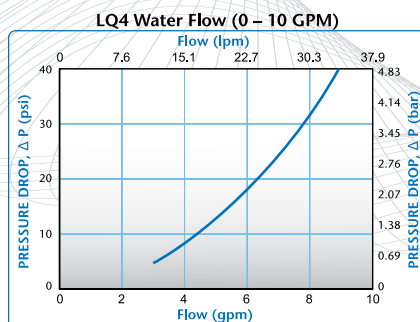

Specifications ● ● ●

PRESSURE:

Vacuum to 120 psi, 8.3 bar

TEMPERATURE:

0°F to 240°F (-17°C to 115°C)

MAXIMUM FLOW AT DISCONNECT:

3.0 gal/min, 11.3L/min

MATERIALS:

Main housing components:

Chrome-plated brass

Valves and thumb latch: Polysulfone

Valve spring (wetted): Stainless steel

External spring: Stainless steel

Seals: EPDM

COLOR:

Chrome with Cool Blue or Warm Red

TUBING SIZES:

1/4" to 3/8" ID, 6.4mm to 9.5mm ID

LUBRICANTS: Krytox® PFPE

SPILLAGE:


0.025 cc per disconnect rated at 0 psi

0.055 cc per disconnect rated at 120 psi


INCLUSION: 0.025 cc per connect

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.

These graphs are intended to give you a general idea of the performance capabilities of each product line. Contact CPC for flow of a particular coupling combination.

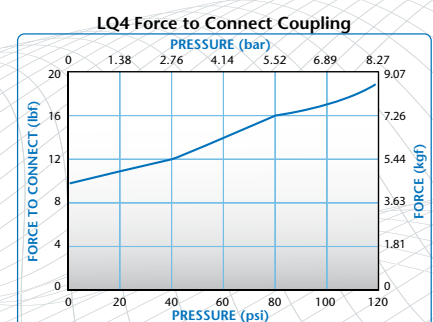



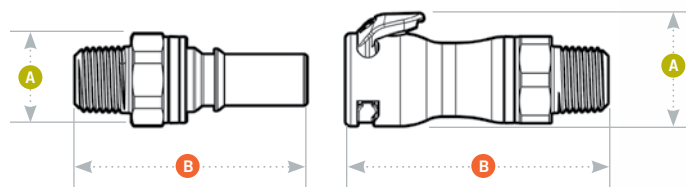

LQ4 DIMENSIONS







A = Height/Diameter
B = Total Length

Coupling Bodies • CHROME-PLATED BRASS

TERMINATION	TUBING/THREAD SIZE	METRIC EQ.	SHUTOFF	A	B
 IN-LINE HOSE BARB	1/4" ID	6.4mm ID	LQ4D17004RED	0.98	2.49
	1/4" ID	6.4mm ID	LQ4D17004BLU	0.98	2.49
	3/8" ID	9.5mm ID	LQ4D17006RED	0.98	2.49
	3/8" ID	9.5mm ID	LQ4D17006BLU	0.98	2.49
 IN-LINE STRAIGHT THREAD PORT SAE	1/4 SAE-4		LQ4D30004RED	0.98	2.29
	1/4 SAE-4		LQ4D30004BLU	0.98	2.29
	3/8 SAE-6		LQ4D30006RED	0.98	2.29
	3/8 SAE-6		LQ4D30006BLU	0.98	2.29
 IN-LINE PIPE THREAD	1/4" NPT		LQ4D10004RED	0.98	2.31
	1/4" NPT		LQ4D10004BLU	0.98	2.31
	3/8" NPT		LQ4D10006RED	0.98	2.31
	3/8" NPT		LQ4D10006BLU	0.98	2.31
 IN-LINE PTF	1/4" ID x 3/8" OD		LQ4D13006RED	0.98	2.46
	1/4" ID x 3/8" OD		LQ4D13006BLU	0.98	2.46

Coupling Inserts • CHROME-PLATED BRASS

TERMINATION	TUBING/THREAD SIZE	METRIC EQ.	SHUTOFF	A	B
 IN-LINE HOSE BARB	1/4" ID	6.4mm ID	LQ4D22004RED	0.74	2.22
	1/4" ID	6.4mm ID	LQ4D22004BLU	0.74	2.22
	3/8" ID	9.5mm ID	LQ4D22006BLU	0.74	2.22
	3/8" ID	9.5mm ID	LQ4D22006RED	0.74	2.22
	3/8" ID	9.5mm ID	LQ4D22006RED	0.74	2.22
 IN-LINE STRAIGHT THREAD PORT SAE	1/4 SAE-4		LQ4D46004BLU	0.80	2.02
	1/4 SAE-4		LQ4D46004RED	0.80	2.02
	3/8 SAE-6		LQ4D46006BLU	0.80	2.02
	3/8 SAE-6		LQ4D46006RED	0.80	2.02
 IN-LINE PIPE THREAD	1/4" NPT		LQ4D24004RED	0.80	2.04
	1/4" NPT		LQ4D24004BLU	0.80	2.04
	3/8" NPT		LQ4D24006RED	0.80	2.04
	3/8" NPT		LQ4D24006BLU	0.80	2.04
 IN-LINE PTF	1/4" ID x 3/8" OD		LQ4D20006RED	0.80	2.19
	1/4" ID x 3/8" OD		LQ4D20006BLU	0.80	2.19

美国CPC_Colder Products Company快速接头和连接器 unless otherwise noted. Tubing must meet stated inside and outside diameters.

授权西北代理商联系方式

西安嘉岳自动化技术有限公司 Garye Automation Company

地址：西安市未央区未央大道138-1号中登大厦A座十二层

电话：029 - 8647 4991 邮编：710016

传真：029 - 8647 3942 公司QQ:3180038393

手机：182 9256 1696

E-mail：sales@garye.cn

Web：http://www.garye.cn