

PMC SERIES CONNECTOR



The 1/8" flow PMC coupling covers a wide variety of general-purpose applications. Featuring the CPC thumb latch, the PMC is easier to use than ball-and-sleeve designs. One-hand connection/disconnection and integral terminations make the PMC the choice for ease of use and manufacture.

This coupling is NuSeal® compatible (see page 27 for details).

FEATURES

Hose barb shroud

Integral terminations

Compatible

Clicks when connected



BENEFITS

Extra protection for the 1/16" hose barb

Fewer leak points, shorter assemblies, faster installations

Mates with PMC12 and MC Series couplings (see pages 30 and 34)

Assurance of a reliable connection

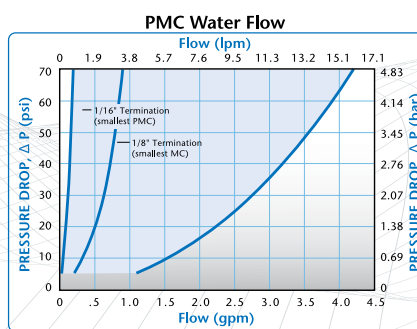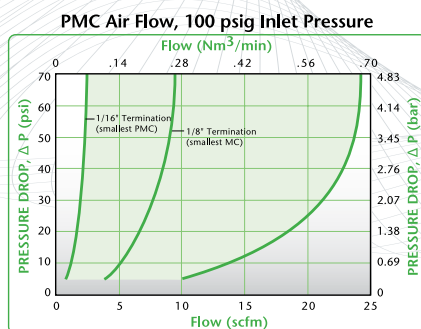

Specifications

PRESSURE:

Vacuum to 120 psi, 8.3 bar

TEMPERATURE:

-40°F to 180°F (-40°C to 82°C)

MATERIALS:

Main components and valves: Acetal

Thumb latch: Stainless steel

Valve spring: 316 stainless steel

External springs and pin: Stainless steel

O-rings: Buna-N

COLOR:

Natural white, others available

TUBING SIZES:


1/16" to 1/4" ID, 1.6mm to 6.4mm ID

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC products in their own application conditions.

Also available in NSF listed versions. Please visit our website for part number information.



These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of each graph represents the operating range of the product family, i.e., upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.

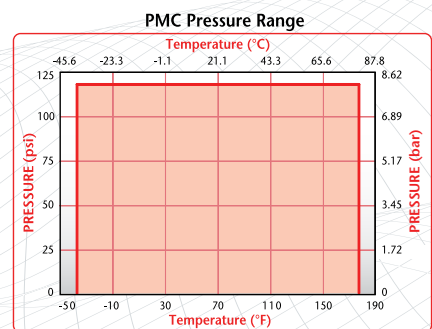

NU-SEAL® QUICK DISCONNECT COUPLING

Nu-Seal® Specifications

PRESSURE:

Vacuum to 20 psi, 1.4 bar

MATERIALS:

Main components:

Low density polyethylene

COLOR:

Translucent

TUBING SIZE:

1/8" ID, 3.2mm ID

Nu-Seal® quick disconnect coupling inserts feature a patented integral seal and are USP Class VI compliant. These economic inserts are ideal for applications that require limited connect/disconnect cycles.

FEATURES

Patented integral seal

Low density polyethylene

Chemically resistant

Compatible

BENEFITS

Economical, allows for disposability and provides leak-free connections

Sterilizable by EtO, E-beam & gamma

Works in many critical USP Class VI material applications

Mates with MC, PMC, PMC12 couplings



**TERMINATION
IN-LINE
HOSE BARB**

TUBING SIZE
1/8" ID

METRIC EQ.
3.2 mm ID

PART NO.
DSM2202

HEIGHT
.50

LENGTH
.98

Liquid Flow Rate Information for Couplings

The chart below shows the flow rate for CPC couplings. Each coupling was tested with water at 70°F (21°C). To determine flow rates for specific coupling configurations use the formula at the right.

$$Q = C_v \sqrt{\frac{\Delta P}{S}}$$

Q = Flow rate in gallons per minute

C_v = Average coefficient across various flow rates (see chart)


ΔP = Pressure drop across coupling (psi)

S = Specific gravity of liquid

C_v VALUES FOR 1/8" FLOW PMC COUPLINGS

	PMCD 2004		PMC 2006		PMCD 2202		PMC 2204		PMCD 2402		PMC 2404		PMCD 2602		PMC 2604		PMCD 2802		PMC 2804		PMCD 3002		PMC 3004	
INSERTS BODIES	PMCD 2004	PMC 2006	PMCD 2202	PMC 2204	PMCD 2402	PMC 2404	PMCD 2602	PMC 2604	PMCD 2802	PMC 2804	PMCD 3002	PMC 3004	PMCD 3202	PMC 3204	PMCD 3402	PMC 3404	PMCD 3602	PMC 3604	PMCD 3802	PMC 3804	PMCD 4002	PMC 4004	PMCD 4202	PMC 4204
PMCD1002	.40	.18	.50	.19	.25	.16	.50	.19	.50	.20	.51	.19	.50	.50	.38	.24	.30	.17	.03	.03				
PMCD1002	.27	.18	.31	.18	.24	.16	.28	.20	.26	.20	.29	.18	.26	.26	.27	.24	.25	.17	.03	.03				
PMCD1004	.40	.21	.50	.24	.26	.18	.50	.24	.50	.20	.51	.24	.50	.50	.38	.26	.30	.19	.03	.03				
PMCD1004	.29	.19	.32	.23	.25	.17	.30	.23	.27	.21	.28	.23	.27	.28	.29	.24	.25	.18	.03	.03				
PMCD1204	.40	.18	.50	.18	.25	.16	.40	.18	.40	.16	.36	.18	.40	.40	.38	.21	.30	.17	.03	.03				
PMCD1204	.21	.17	.22	.17	.20	.16	.22	.17	.21	.17	.20	.17	.21	.22	.21	.18	.21	.16	.03	.03				
PMCD1602	.23	.15	.28	.18	.19	.14	.27	.15	.27	.15	.28	.18	.27	.27	.23	.16	.20	.14	.03	.03				
PMCD1602	.19	.15	.19	.15	.17	.14	.19	.15	.18	.15	.18	.15	.18	.19	.19	.15	.18	.14	.03	.03				
PMCD1604	.33	.23	.44	.24	.24	.18	.44	.23	.44	.20	.38	.24	.38	.44	.33	.26	.26	.19	.03	.03				
PMCD1604	.23	.17	.26	.21	.22	.16	.26	.21	.26	.19	.25	.21	.21	.26	.23	.24	.22	.16	.03	.03				
PMCD1703	.25	.20	.30	.20	.20	.17	.30	.20	.30	.19	.28	.20	.28	.30	.25	.18	.21	.17	.03	.03				
PMCD1703	.20	.17	.20	.17	.19	.15	.21	.17	.19	.17	.20	.17	.19	.20	.20	.16	.19	.16	.03	.03				
PMCD1701	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03				
PMCD1701	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03				


PMC DIMENSIONS

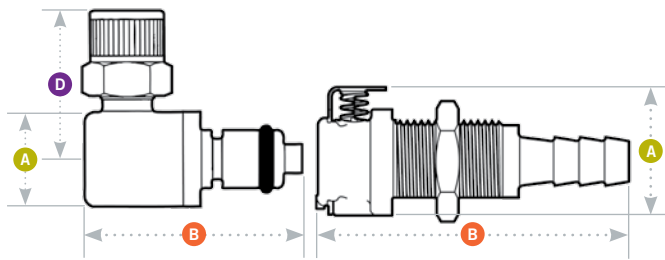

- A = Height/Diameter
- B = Total Length
- D = Elbow Radial Length

Panel Dimensions

	PANEL OPENING	PANEL THICKNESS MAX. – MIN.	PANEL NUT HEX	PANEL NUT THREAD
COUPLING BODIES	see drawing	.50 – .05	5/8	1/2-24UNS
COUPLING INSERTS	1/2	.30 – .05	5/8	1/2-24UNS











Greenlee® punch number 60077

Coupling Bodies • ACETAL

	TERMINATION IN-LINE PIPE THREAD	TUBING/THREAD SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B
		1/8" NPT		PMC1002	PMCD1002	.79	1.00
		1/8" BSPT		PMC1002BSPT	PMCD1002BSPT	.79	1.00
		1/4" NPT		PMC1004	PMCD1004	.79	1.10
		1/4" BSPT		PMC1004BSPT	PMCD1004BSPT	.79	1.10
	PANEL MOUNT FERRULELESS POLYTUBE FITTING, PTF†	5/32" OD, .10" ID	4.0mm OD, 2.0mm ID	PMC12M42	PMCD12M42	.77	1.65
		1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC12025	PMCD12025	.77	1.70
				PMC1204	PMCD1204	.77	1.72
	PANEL MOUNT HOSE BARB	1/16" ID	1.6mm ID	PMC1601	PMCD1601	.77	1.40
		1/8" ID	3.2mm ID	PMC1602	PMCD1602	.77	1.65
		3/16" ID	4.8mm ID	PMC1603	PMCD1603	.77	1.85
		1/4" ID	6.4mm ID	PMC1604	PMCD1604	.77	1.85
	PANEL MOUNT FEMALE THREAD	10-32 UNF		PMC181032	PMCD181032	.77	1.25
	IN-LINE FERRULELESS POLYTUBE FITTING, PTF†	5/32" OD, .10" ID	4.0mm OD, 2.0mm ID	PMC13M42	PMCD13M42	.81	1.65
			4.0mm OD, 2.5mm ID	PMC13025	PMCD13025	.81	1.65
			5.0mm OD, 3.0mm ID	PMC13M5	PMCD13M5	.81	1.72
		1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC1304	PMCD1304	.81	1.75
	IN-LINE HOSE BARB	1/16" ID	1.6mm ID	PMC1701	PMCD1701	.81	1.41
		1/8" ID	3.2mm ID	PMC1702	PMCD1702	.81	1.45/1.65
		3/16" ID	4.8mm ID	PMC1703	PMCD1703	.81	1.65/1.85
		1/4" ID	6.4mm ID	PMC1704	PMCD1704	.81	1.65/1.85
	IN-LINE FEMALE THREAD	10-32 UNF		PMC191032	PMCD191032	.81	1.25

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters.
†NOTE: CPC's Ferruleless PTF (polytube fitting) terminations do not require ferrules to achieve a secure connection and are therefore easier to use and reuse. PTF fittings are designed for semi-rigid tubing, i.e., polyethylene, nylon, polyurethane, etc.

Coupling Inserts • ACETAL

	TERMINATION IN-LINE PIPE THREAD	TUBING/THREAD SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B	D
		1/8" NPT		PMC2402	PMCD2402	.58	1.03/1.45	
		1/8" BSPT		PMC2402BSPT	PMCD2402BSPT	.58	1.03/1.44	
		1/4" NPT		PMC2404	PMCD2404	.65	1.13/1.42	
		1/4" BSPT		PMC2404BSPT	PMCD2404BSPT	.65	1.13/1.42	
	PANEL MOUNT FERRULELESS POLYTUBE FITTING, PTF† (non-valved shown)	1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC4004	PMCD4004	.72	1.70/1.82	
	PANEL MOUNT HOSE BARB	1/16" ID	1.6mm ID	PMC4201	PMCD4201	.72	1.38/1.50	
		1/8" ID	3.2mm ID	PMC4202	PMCD4202	.72	1.63/1.75	
		3/16" ID	4.8mm ID	PMC4203	PMCD4203	.72	1.83/1.95	
		1/4" ID	6.4mm ID	PMC4204	PMCD4204	.72	1.83/1.95	
	IN-LINE FERRULELESS POLYTUBE FITTING, PTF†	5/32" OD, .10" ID	4.0mm OD, 2.0mm ID	PMC20M42	PMCD20M42	.58	1.08/1.60	
		1/4" OD, .17" ID	4.0mm OD, 2.5mm ID	PMC20025	PMCD20025	.58	1.13/1.65	
		1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC2004	PMCD2004	.58	1.15/1.57	
		3/8" OD, .25" ID	9.5mm OD, 6.4mm ID	PMC2006	PMCD2006	.65	1.40/1.52	
	IN-LINE HOSE BARB (non-valved shown)	1/16" ID	1.6mm ID	PMC2201	PMCD2201	.50	.80/1.47	
		1/8" ID	3.2mm ID	PMC2202	PMCD2202	.50	1.00/1.67	
		3/16" ID	4.8mm ID	PMC2203	PMCD2203	.50	1.20/1.88	
		1/4" ID	6.4mm ID	PMC2204	PMCD2204	.50	1.22/1.70	
	IN-LINE FEMALE THREAD	10-32 UNF		PMC281032	PMCD281032	.58	.63/1.31	
	ELBOW FERRULELESS POLYTUBE FITTING, PTF†	5/32" OD, .10" ID	4.0mm OD, 2.5mm ID	PMC21025		.50	1.17	.75
		1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC2104	PMCD2104	.50	1.17/1.21	.77
	ELBOW HOSE BARB (non-valved shown)	1/8" ID	3.2mm ID	PMC2302	PMCD2302	.50	.85/1.21	.75/.69
		1/4" ID	6.4mm ID	PMC2304	PMCD2304	.50	1.00/1.21	.95/.90

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters. Couplings are pictured with valves unless otherwise noted. †NOTE: CPC's Ferruleless PTF (polytube fitting) terminations do not require ferrules to achieve a secure connection and are therefore easier to use and reuse. PTF fittings are designed for semi-rigid tubing, i.e., polyethylene, nylon, polyurethane, etc.

美国CPC_Colder Products Company快速接头和连接器
授权西北代理商联系方式

西安嘉岳自动化技术有限公司 Garye Automation Company

地址：西安市未央区未央大道138-1号中登大厦A座十二层

电话：029 - 8647 4991 邮编：710016

传真：029 - 8647 3942 公司QQ:3180038393

手机：182 9256 1696

E-mail：sales@garye.cn

Web：http://www.garye.cn