

NEW!

SNAPQUICK SERIES

F

R

E

A

N

C

SnapQuik™ is a break away connector ideal for small bore applications. The compact design delivers high flow fluid transfer in a small profile. Featuring a unique internal latching mechanism that creates a smooth, streamlined exterior that is easy to clean and use. The user-friendly break away design of SnapQuik prevents misconnections with luers, protects equipment and ensures patient safety.

Features

- Break away latch mechanism
- Internal latch design
- Audible click at connection
- Does not mate to luer fittings

Benefits

- Intuitive, rapid disconnection
- Streamlined exterior is easy to clean
- Assures reliable connection is made
- Improved patient safety



Specifications

Pressure: Vacuum to 15 psi, 1.03 bar

Temperature: 32° to 122° F (0° to 50° C)

Materials:

Main components: Acetal

O-ring: Buna-N


Color: Natural White

Tubing Sizes: 3/32" and 1/8" ID


WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of Colder's products in their own application conditions.

SnapQuik's revolutionary lubrication technique ensures consistent connection forces throughout the lifetime of the connectors, even when aggressive cleaning techniques are used.

SnapQuik Water Flow

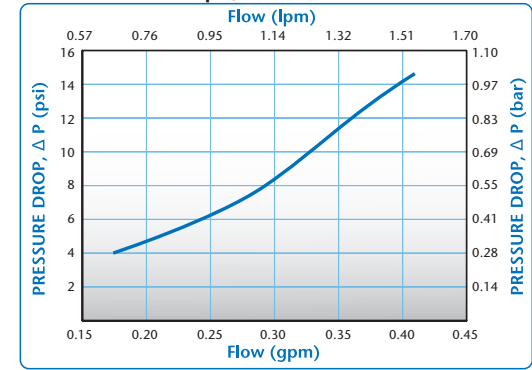


SnapQuik Air Flow, 100 psig Inlet Pressure

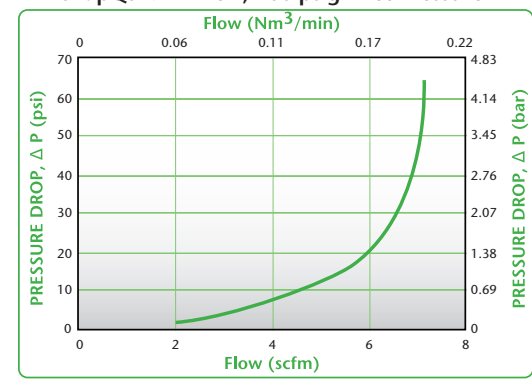

These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of the graph represents the operating range of the product family, i.e. upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.

Product Dimensions

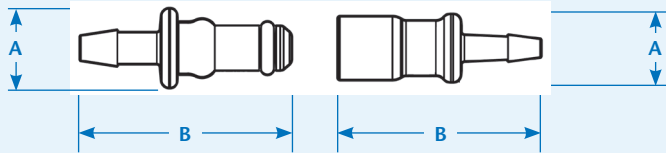

A = Height/Diameter
B = Total Length

Coupling Bodies

ACETAL



TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	A	B
IN-LINE	3/32" ID	2.4mm	BSQ17015	0.36	1.09
HOSE BARB	1/8" ID	3.2mm	BSQ1702	0.36	1.09

Coupling Inserts

ACETAL



TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	A	B
IN-LINE	3/32" ID	2.4mm	BSQ22015	0.42	1.14
HOSE BARB	1/8" ID	3.2mm	BSQ2202	0.42	1.14



Visit us at www.colder.com
or call 651-645-0091
to get a free catalog CD or to
find your local distributor.



CPC 西北地区签约经销商：西安嘉岳自动化技术有限公司

Garye Automation Company

地址：西安市未央区经济技术开发区凤城五路 89 号 5 幢 1 单元 10601 室

电话：029 - 8647 4991 手机：18292561696

<http://www.garye.cn>

E-mail：sales@garye.cn

邮编：710018

We inspire confidence at every point of connection.

WARRANTY: All sales are subject to Colder Products Company's limited express warranty set forth in the Colder catalog. Contact your local distributor or Colder Customer Service for warranty provisions.

Warning: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of Colder. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.