

# BLQ2 SERIES CONNECTOR



**BLQ2 Series quick disconnect couplings** provide ultra-reliable, dripless connections and disconnections that protect valuable electronics. Designed specifically for rack mounted liquid cooling applications, the BLQ2 utilizes patent-pending valve technology that eliminates drips and is able to withstand long-term connection.

## FEATURES

- Non-spill design
- Redundant sealing when connected
- Friction-free valve
- Ruggedness
- Axial engagement tolerance

## BENEFITS

- Disconnect under pressure with no spills
- Extra protection from leaks
- Valving system designed for extended periods in connected state
- Able to withstand long-term, repeated use
- Valves designed to allow full flow even when not fully engaged

## Specifications

### PRESSURE:

Vacuum to 200 psi, 13.8 bar

### TEMPERATURE:

0°F to 240°F (-17°C to 115°C)

### MAXIMUM FLOW AT DISCONNECT:

1.00 gal/min at 0 - 100 psi; .025 gal/min at 101 - 200 psi

### MATERIALS:

**Main Housing Components:**

Chrome-plated brass

**Valves:** Polysulfone

**Valve Springs (wetted):** Stainless steel

**Seals:** EPDM

**COLOR:** Chrome

**THREAD SIZES:** 1/4" SAE-4

**LUBRICANTS:** Krytox® PFPE

### SPILLAGE:


<0.015 cc per disconnect at 0 psi;  
<0.063 cc per disconnect at 200 psi

**INCLUSION:** <0.063 cc per connect


**WARNING:** Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.

These graphs are intended to give you a general idea of the performance capabilities of each product line. Contact CPC for flow of a particular coupling combination


BLQ2 Water Flow

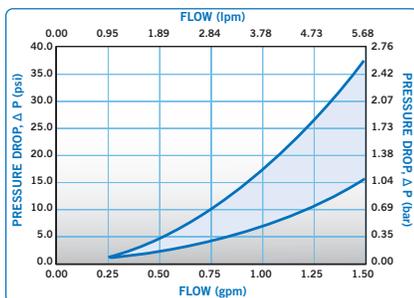

BLQ2 Force to Connect Coupling

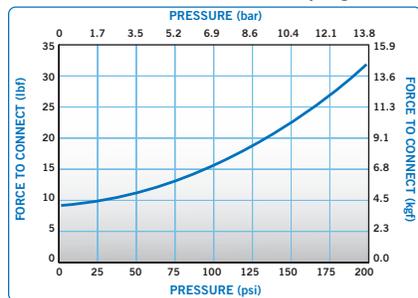

BLQ2 Actuation vs Cv

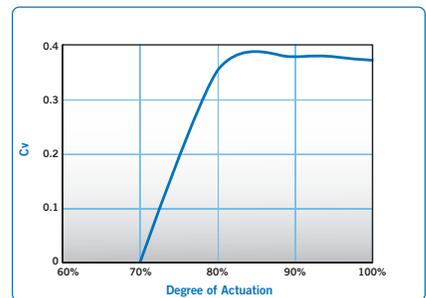


Visit us at [cpcworldwide.com](http://cpcworldwide.com) or call 800-444-2747 to get a free catalog or to find your local distributor.

# BLQ2 SERIES CONNECTOR

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters.

**A** = Height/Diameter  
**B** = Total Length

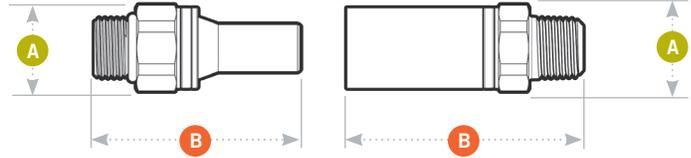

## Coupling Bodies • CHROME-PLATED BRASS



**TERMINATION**  
 IN-LINE STRAIGHT  
 THREAD PORT SAE

**TUBING/THREAD SIZE**  
 ¼ SAE-4

**METRIC EQ.**  
 SAE 4

**SHUTOFF**  
 BLQ2D3004

**A**  
 0.62

**B**  
 1.310

## Coupling Inserts • CHROME-PLATED BRASS



**TERMINATION**  
 IN-LINE STRAIGHT  
 THREAD PORT SAE

**TUBING/THREAD SIZE**  
 ¼ SAE-4

**METRIC EQ.**  
 SAE 4

**SHUTOFF**  
 BLQ2D4604

**A**  
 0.620

**B**  
 1.320



**COLDER PRODUCTS COMPANY**  
 U.S.A.

PHONE +1 651-645-0091  
 FAX +1 651-645-5404  
 TOLL FREE 800-444-2474

**COLDER PRODUCTS COMPANY GMBH**  
 Germany

PHONE +49-6026-9973-0  
 FAX +49-6026-9973-173

**COLDER PRODUCTS COMPANY LIMITED**  
 Hong Kong S.A.R. of China

PHONE +852-2987-5272  
 FAX +852-2987-2509

Smart fluid handling to take you forward, faster.

[cpcworldwide.com/ContactUs](http://cpcworldwide.com/ContactUs)

WARRANTY: All sales are subject to Colder Products Company's limited express warranty set forth in the CPC catalog. Contact your local distributor or CPC Customer Service for warranty provisions.

Warning: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

COPYRIGHT © 2019 BY COLDER PRODUCTS COMPANY. COLDER PRODUCTS COMPANY, COLDER PRODUCTS AND CPC ARE REGISTERED TRADEMARKS WITH THE US PATENT & TRADEMARK OFFICE.

SPEC1053 PRINTED IN THE U.S.A.